

调速减速电机 SPEED CONTROL GEAR MOTOR

6W 60mm



● 电机型号/性能 List of motor characteristics

电机型号 Motor Model		输出功率 Output Power	电压 Voltage	频率 Frequency	电流 Current	转速范围 Speed Range	额定转矩 Rated Torque		启动转矩 Starting Torque	运行电容 Capacitor
齿轮轴型 Pinion Shaft	圆轴型 Round Shaft	W	V	Hz	A	r/min	90r/min	1200r/min	mN.m	μF/VAC
							mN.m			
2IK6RGN-C	2IK6RA-C	6	1ph220	50	0.12	90~1350	19	45	38	0.8/450
				60	0.11	90~1550	20	36	40	
2IK6RGN-A	2IK6RA-A	6	1ph110	50	0.25	90~1350	19	45	38	3.0/250
				60	0.22	90~1550	20	36	40	

● 从调速电机转矩/转速曲线可知,虽然调速电机的调速范围为:50Hz...90~1350转/分钟;60Hz...90~1550转/分钟。但由于低速时(≤400转/分钟),电机转矩下降较多,易发生过载,且电机直连风扇冷却效果差,易发热,因此必须预留足够的功率余量,并且不要经常工作在低速区。因此电机最佳调速范围为:50Hz...900~1350转/分钟;60Hz...900~1550转/分钟。

● 各种安全规格以电机铭牌上的型号名取得认证。

● 注:“-A”型号中电压为110V时,配置电容器容量以实际铭牌为准。

● It can be seen from the torque/speed curve of the speed-regulating motor, although the speed range of the speed-regulating motor is :50Hz... 90~1350 RPM; 60 hz... 90-1550 revolutions per minute. But due to the low speed (400 RPM) or less, when the motor torque drop more, prone to overload, and poor motor directly connected the fan cooling effect, easy to heat, so must set aside enough power margin, and don't often work in low speed zone. Therefore, the optimal speed range of the motor is :50Hz... 900~1350 revolutions per minute; 60 hz... 900~1550 RPM.

● When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

● Note "sAit means the voltage 110v. the assembly capacitor vaule it is according the label.

● 减速箱减速比/性能对照表 Gear reduction ratio/performance comparison

减速比 Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
50Hz	转速 Speed r/min	450	375	270	225	180	150	135	108	90	75	67.5	54	45	37.5	33.7	27	22.5	18	15	13.5	11	9	7.5	6.75
	转矩 Torque N.m	0.11	0.13	0.18	0.21	0.27	0.32	0.36	0.45	0.54	0.64	0.7	0.80	0.97	1.16	1.29	1.61	1.74	2.17	2.60	2.89	3	3	3	3
60Hz	转速 Speed r/min	516	430	310	258	206	172	155	124	103	86	77.5	62	51.6	43	38.75	31	25.8	20.6	17.2	15.5	12.9	10.3	8.6	7.75
	转矩 Torque N.m	0.09	0.11	0.15	0.18	0.23	0.27	0.30	0.38	0.45	0.54	0.6	0.68	0.821	0.98	1.09	1.36	1.47	1.84	2.20	2.45	2.94	3	3	3

● 表中转速是以电机的平均转速为基数除以减速比而算出的数值。实际转速将随负载大小而变化,变化范围 2~20%。

● 表中 色框表示输出轴的旋转方向与电机旋转方向相反。

● 表中转矩是以电机额定转矩 × 减速比 × 传动效率计算而得。

● 减速箱的最大容许转矩为 3N·M。


● In the table, the speed is calculated from the base of the motor's average speed divided by the deceleration ratio. The actual speed will vary with the load, ranging from 2% to 20%.

- The box in the table indicates that the rotation direction of the output axis is opposite to that of the motor.
- Table transfer torque is calculated from motor rated torque * deceleration ratio * transmission efficiency.
- The maximum allowable torque of the decelerator is 3N·M.

● **外形尺寸 (单位mm) Dimension (unit mm)**


● **圆轴电机**

重量 Weighr: 1.1kg

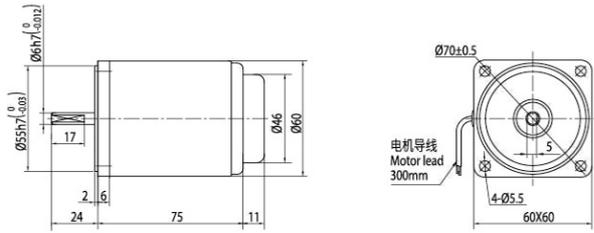

● **组合: 引线型电机 + 标准减速箱 (减速比 1:3~200)**

重量 Weighr: 1.6kg

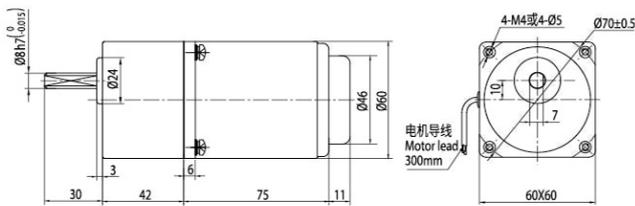


● **短箱体Short Gear Box**

- 其中速比 3~18 可以做成短型减速箱, 高度为 32mm。Gear ratio 3~18, short case is possible, Height of 32 mm.

● **接线图Wiring Diagram**

- 运转方向指从电机轴看来的方向。CW 表示顺时针方向, CCW 表示逆时针方向。
- 表中所记型号为齿轮轴型, 圆轴型亦同。
- The direction of motor rotation is as viewed from the shaft end of motoc CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Name indicated in the list is pinion shaft we, also valid for the equivalent round shaft type.

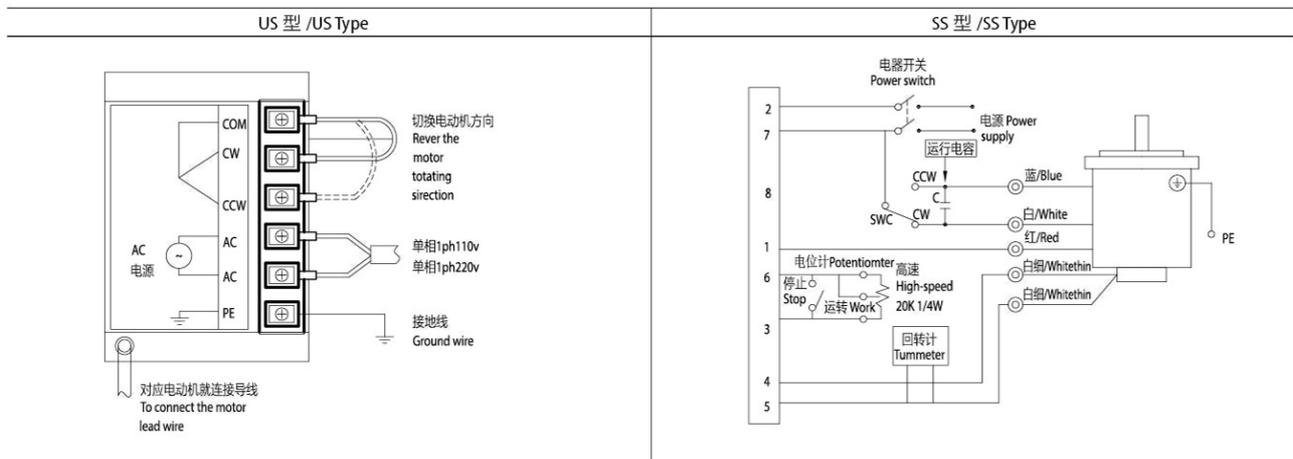

调速减速电机 SPEED CONTROL GEAR MOTOR

15W 70mm



● 电机型号/性能 List of motor characteristics

电机型号 Motor Model		输出功率 Output Power	电压 Voltage	频率 Frequency	电流 Current	转速范围 Speed Range	额定转矩 Rated Torque		启动转矩 Starting Torque	运行电容 Capacitor
齿轮轴型 Pinion Shaft	圆轴型 Round Shaft	W	V	Hz	A	r/min	90r/min	1200r/min	mN.m	μF/VAC
							mN.m			
3IK15RGN-C	3IK15RA-C	15	1ph220	50	0.17	90~1350	40	110	80	1.2/450
				60	0.15	90~1550	37	90	75	
3IK15RGN-A	3IK15RA-A	15	1ph110	50	0.34	90~1350	40	110	80	5.0/250
				60	0.30	90~1550	20	37	75	

● 从调速电机转矩/转速曲线可知,虽然调速电机的调速范围为:50Hz...90~1350转/分钟;60Hz...90~1550转/分钟。但由于低速时(≤400转/分钟),电机转矩下降较多,易发生过载,且电机直连风扇冷却效果差,易发热,因此必须预留足够的功率余量,并且不要经常工作在低速区。因此电机最佳调速范围为:50Hz...900~1350转/分钟;60Hz...900~1550转/分钟。

● 各种安全规格以电机铭牌上的型号名取得认证。

● 注:“A”型号中电压为110V时,配置电容器容量以实际铭牌为准。

● It can be seen from the torque/speed curve of the speed-regulating motor, although the speed range of the speed-regulating motor is :50Hz... 90~1350 RPM; 60 Hz... 90~1550 revolutions per minute. But due to the low speed (400 RPM) or less, when the motor torque drop more, prone to overload, and poor motor directly connected the fan cooling effect, easy to heat, so must set aside enough power margin, and don't often work in low speed zone. Therefore, the optimal speed range of the motor is :50Hz... 900~1350 revolutions per minute; 60 Hz... 900~1550 RPM.

● When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

● Note "A" means the voltage 110v, the assembly capacitor value it is according to the label.

● 减速箱减速比/性能对照表 Gear reduction ratio/performance comparison

减速比 Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
50Hz	转速 Speed r/min	450	375	270	225	180	150	135	108	90	75	67.5	54	45	37.5	33.7	27	22.5	18	15	13.5	11	9	7.5	6.75
	转矩 Torque N.m	0.30	0.36	0.51	0.61	0.76	0.91	1.01	1.261	1.511	1.64	1.82	2.27	2.73	3.27	3.63	4.54	4.91	5	5	5	5	5	5	5
60Hz	转速 Speed r/min	516	430	310	258	206	172	155	124	103	86	77.5	62	51.6	43	38.75	31	25.8	20.6	17.2	15.5	12.9	10.3	8.6	7.75
	转矩 Torque N.m	0.22	0.27	0.37	0.45	0.56	0.67	0.74	0.93	1.11	1.20	1.34	1.67	2.01	2.41	2.67	3.34	3.11	4.11	5	5	5	5	5	5

● 表中转速是以电机的平均转速为基数除以减速比而算出的数值。实际转速将随负载大小而变化,变化范围2~20%。

● 表中色框表示输出轴的旋转方向与电机旋转方向相反。

● 表中转矩是以电机额定转矩×减速比×传动效率计算而得。

● 减速箱的最大容许转矩为5N.M。


● In the table, the speed is calculated from the base of the motor's average speed divided by the deceleration ratio. The actual speed will vary with the load, ranging from 2% to 20%.

- The box in the table indicates that the rotation direction of the output axis is opposite to that of the motor.
- Table transfer torque is calculated from motor rated torque * deceleration ratio * transmission efficiency.
- The maximum allowable torque of the decelerator is 5N·M.

● 外形尺寸 (单位mm) Dimension (unit mm)

● 圆轴电机


重量 Weighr: 1.45kg

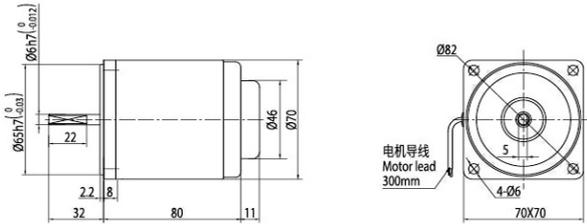

● 组合: 引线型电机 + 标准减速箱 (减速比 1:3~200)

重量 Weighr: 1.95kg

● 键 (减速器附件)

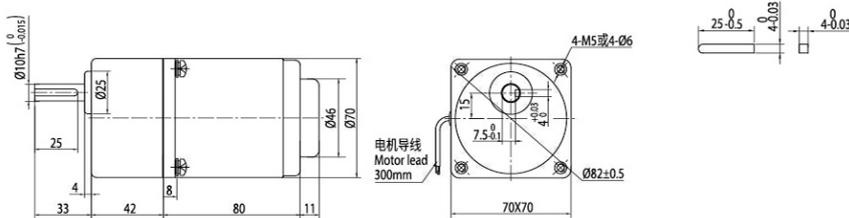


● 短箱体Short Gear Box

- 其中速比 3~15 可以做成短型减速箱, 高度为 32mm。Gear ratio 3~15, short case is possible, Height of 32 mm.

● 接线图Wiring Diagram

- 运转方向指从电机轴看来的方向。CW 表示顺时针方向, CCW 表示逆时针方向。
- 表中所记型号为齿轮轴型, 圆轴型亦同。
- The direction of motor rotation is as viewed from the shaft end of motoc CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Name indicated in the list is pinion shaft we, also valid for the equivalent round shaft type.

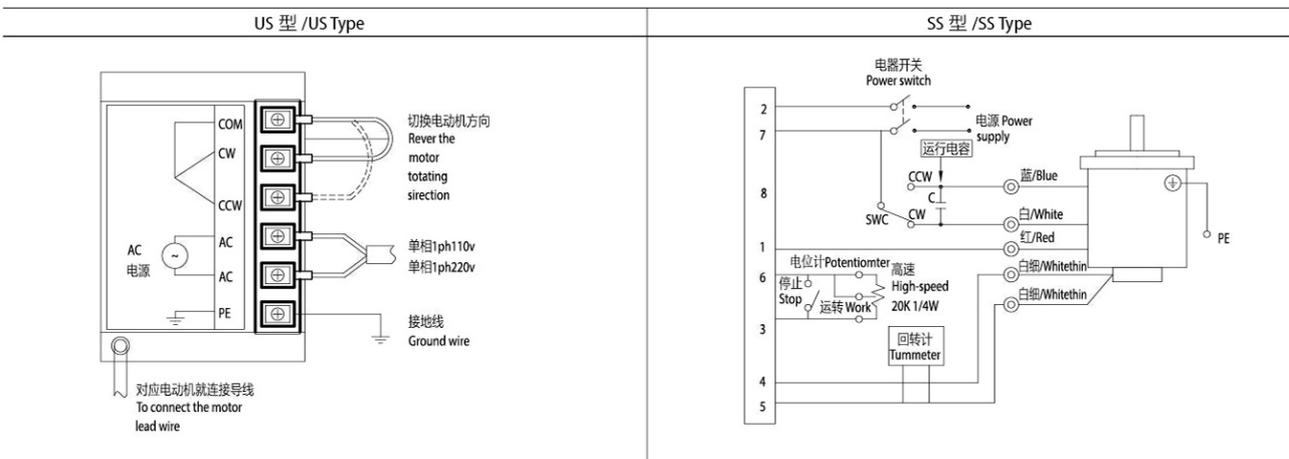

调速减速电机 SPEED CONTROL GEAR MOTOR

25W 80mm



● 电机型号/性能 List of motor characteristics

电机型号 Motor Model		输出功率 Output Power	电压 Voltage	频率 Frequency	电流 Current	转速范围 Speed Range	额定转矩 Rated Torque		启动转矩 Starting Torque	运行电容 Capacitor
齿轮轴型 Pinion Shaft	圆轴型 Round Shaft	W	V	Hz	A	r/min	90r/min	1200r/min	mN.m	μF/VAC
							mN.m			
4IK25RGN-C	4IK25RA-C	25	1ph220	50	0.22	90~1350	70	190	80	1.8/450
				60	0.22	90~1550	60	153	75	
4IK25RGN-A	4IK25RA-A	25	1ph110	50	0.43	90~1350	70	190	80	7.0/250
				60	0.41	90~1550	60	153	75	

●从调速电机转矩/转速曲线可知,虽然调速电机的调速范围为:50Hz...90~1350转/分钟;60Hz...90~1550转/分钟。但由于低速时(≤400转/分钟),电机转矩下降较多,易发生过载,且电机直连风扇冷却效果差,易发热,因此必须预留足够的功率余量,并且不要经常工作在低速区。因此电机最佳调速范围为:50Hz...900~1350转/分钟;60Hz...900~1550转/分钟。

●各种安全规格以电机铭牌上的型号名取得认证。

●注:“A”型号中电压为110V时,配置电容器容量以实际铭牌为准。

●It can be seen from the torque/speed curve of the speed-regulating motor, although the speed range of the speed-regulating motor is :50Hz... 90~1350 RPM; 60 Hz... 90~1550 revolutions per minute. But due to the low speed (400 RPM) or less, when the motor torque drop more, prone to overload, and poor motor directly connected the fan cooling effect, easy to heat, so must set aside enough power margin, and don't often work in low speed zone. Therefore, the optimal speed range of the motor is :50Hz... 900~1350 revolutions per minute; 60 Hz... 900~1550 RPM.

●When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

●Note "sAit means the voltage 110v. the assembly capacitor vaule it is according the labe.

● 减速箱减速比/性能对照表 Gear reduction ratio/performance comparison

减速比 Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
50Hz	转速 Speed r/min	450	375	270	225	180	150	135	108	90	75	67.5	54	45	37.5	33.7	27	22.5	18	15	13.5	11	9	7.5	6.75
	转矩 Torque N.m	0.45	0.54	0.75	0.90	1.12	1.35	1.50	1.87	2.25	2.69	2.99	3.37	4.04	4.85	5.39	6.74	7.28	8	8	8	8	8	8	8
60Hz	转速 Speed r/min	516	430	310	258	206	172	155	124	103	86	77.5	62	51.6	43	38.75	31	25.8	20.6	17.2	15.5	12.9	10.3	8.6	7.75
	转矩 Torque N.m	0.36	0.437	0.61	0.73	0.91	1.09	1.21	1.52	1.82	2.18	2.43	2.73	3.27	3.93	4.37	5.46	6.55	8	8	8	8	8	8	8

●表中转速是以电机的平均转速为基数除以减速比而算出的数值。实际转速将随负载大小而变化,变化范围2~20%。

●表中色框表示输出轴的旋转方向与电机旋转方向相反。

●表中转矩是以电机额定转矩×减速比×传动效率计算而得。

●减速箱的最大容许转矩为8N.M。

●In the table, the speed is calculated from the base of the motor's average speed divided by the deceleration ratio. The actual speed will vary with the load, ranging from 2% to 20%.

调速减速电机 SPEED CONTROL GEAR MOTOR

40W 90mm



● 电机型号/性能 List of motor characteristics

电机型号 Motor Model		输出功率 Output Power	电压 Voltage	频率 Frequency	电流 Current	转速范围 Speed Range	额定转矩 Rated Torque		启动转矩 Starting Torque	运行电容 Capacitor
齿轮轴型 Pinion Shaft	圆轴型 Round Shaft	W	V	Hz	A	r/min	90r/min	1200r/min	mN.m	μF/VAC
							mN.m			
5IK40RGN-C	5IK40RA-C	40	1ph220	50	0.32	90~1350	110	320	220	2.5/450
				60	0.36	90~1550	110	230	220	
5IK40RGN-A	5IK40RA-A	40	1ph110	50	0.64	90~1350	110	300	220	10.0/250
				60	0.64	90~1550	110	230	220	

● 从调速电机转矩/转速曲线可知,虽然调速电机的调速范围为:50Hz...90~1350转/分钟;60Hz...90~1550转/分钟。但由于低速时(≤400转/分钟),电机转矩下降较多,易发生过载,且电机直连风扇冷却效果差,易发热,因此必须预留足够的功率余量,并且不要经常工作在低速区。因此电机最佳调速范围为:50Hz...900~1350转/分钟;60Hz...900~1550转/分钟。

● 各种安全规格以电机铭牌上的型号名取得认证。

● 注:“-A”型号中电压为110V时,配置电容器容量以实际铭牌为准。

● It can be seen from the torque/speed curve of the speed-regulating motor, although the speed range of the speed-regulating motor is :50Hz... 90~1350 RPM; 60 Hz... 90-1550 revolutions per minute. But due to the low speed (400 RPM) or less, when the motor torque drop more, prone to overload, and poor motor directly connected the fan cooling effect, easy to heat, so must set aside enough power margin, and don't often work in low speed zone. Therefore, the optimal speed range of the motor is :50Hz... 900~1350 revolutions per minute; 60 Hz... 900~1550 RPM.

● When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

● Note “-A” means the voltage 110v. the assembly capacitor vaule it is according the labe.

● 减速箱减速比/性能对照表 Gear reduction ratio/performance comparison

减速比 Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
50Hz	转速 Speed r/min	450	375	270	225	180	150	135	108	90	75	67.5	54	45	37.5	33.7	27	22.5	18	15	13.5	11	9	7.5	6.75
	转矩 Torque N.m	0.71	0.86	1.19	1.43	1.79	2.14	2.38	2.98	3.57	3.86	4.29	5.36	6.43	7.72	7.72	9.65	10	10	10	10	10	10	10	10
60Hz	转速 Speed r/min	516	430	310	258	206	172	155	124	103	86	77.5	62	51.6	43	38.75	31	25.8	20.6	17.2	15.5	12.9	10.3	8.6	7.75
	转矩 Torque N.m	0.56	0.68	0.94	1.13	1.41	1.69	1.88	2.35	2.82	3.04	3.38	4.23	5.07	6.09	6.09	7.61	9.13	10	10	10	10	10	10	10

● 表中转速是以电机的平均转速为基数除以减速比而算出的数值。实际转速将随负载大小而变化,变化范围2~20%。

● 表中 色框表示输出轴的旋转方向与电机旋转方向相反。

● 表中转矩是以电机额定转矩×减速比×传动效率计算而得。

● 减速箱的最大容许转矩为10N·M。


● In the table, the speed is calculated from the base of the motor's average speed divided by the deceleration ratio. The actual speed will vary with the load, ranging from 2% to 20%.

- The box in the table indicates that the rotation direction of the output axis is opposite to that of the motor.
- Table transfer torque is calculated from motor rated torque * deceleration ratio * transmission efficiency.
- The maximum allowable torque of the decelerator is 10N·M.

● **外形尺寸 (单位mm) Dimension (unit mm)**


● **圆轴电机**

重量 Weighr: 2.15kg

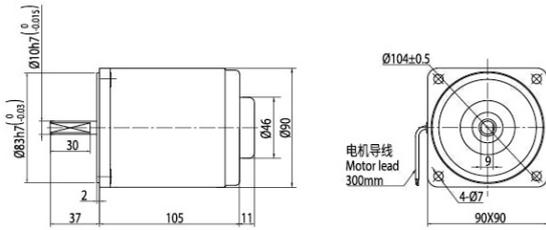


● **组合: 引线型电机 + 标准减速箱 (减速比 1:3~200)**

重量 Weighr: 3.85kg

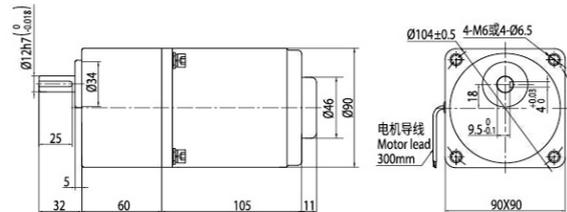

● **组合: 接线盒 (可选, 详见 P148) 型电机 + 标准减速箱 (减速比 1:3~200)**

重量 Weighr: 4.0kg

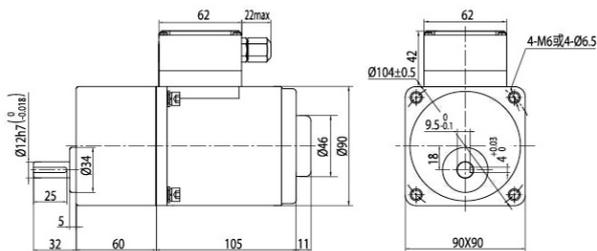


● **中间齿轮箱 Decimal Gearhead**


可安装在齿轮轴型上 Can be connected to GN pinion shaft type

电动机外形与齿轮轴型相同 4GN10XK

重量 Weight: 0.41kg

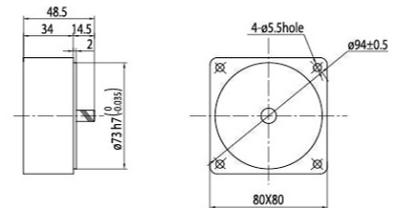

● **键 (减速器附件)**




● **短箱体 Short Gear Box**

● 其中速比 3~18 可以做成短型减速箱, 高度为 42mm。Gear ratio 3~18, short case is possible, Height of 42 mm.


● **接线图 Wiring Diagram**

- 运转方向指从电机轴看来的方向。CW 表示顺时针方向, CCW 表示逆时针方向。
- 表中所记型号为齿轮轴型, 圆轴型亦同。
- The direction of motor rotation is as viewed from the shaft end of motoc CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Name indicated in the list is pinion shaft we, also valid for the equivalent round shaft type.

US 型 /US Type

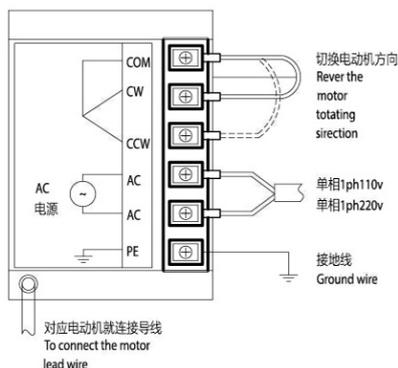

SS 型 /SS Type

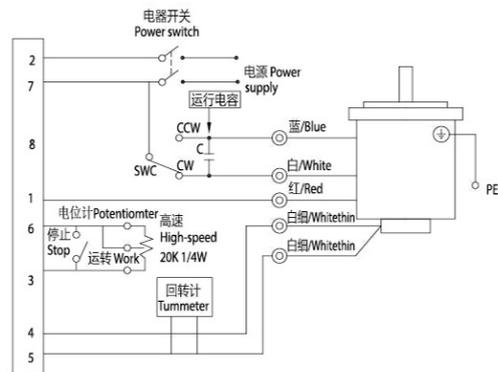

调速减速电机 SPEED CONTROL GEAR MOTOR

60W 90mm



● 电机型号/性能 List of motor characteristics

电机型号 Motor Model		输出功率 Output Power	电压 Voltage	频率 Frequency	电流 Current	转速范围 Speed Range	额定转矩 Rated Torque		启动转矩 Starting Torque	运行电容 Capacitor
齿轮轴型 Pinion Shaft	圆轴型 Round Shaft	W	V	Hz	A	r/min	90r/min	1200r/min	mN.m	μF/VAC
							mN.m			
5IK60RGN-CF	5IK60RA-CF	60	1ph220	50	0.47	90~1350	175	450	350	4.0/450
				60	0.50	90~1550	175	360	350	
5IK60RGN-AF	5IK60RA-AF	60	1ph110	50	0.92	90~1350	175	450	350	15.0/250
				60	0.93	90~1550	175	360	350	

● 从调速电机转矩/转速曲线可知,虽然调速电机的调速范围为:50Hz...90~1350转/分钟;60Hz...90~1550转/分钟。但由于低速时(≤400转/分钟),电机转矩下降较多,易发生过载,且电机直连风扇冷却效果差,易发热,因此必须预留足够的功率余量,并且不要经常工作在低速区。因此电机最佳调速范围为:50Hz...900~1350转/分钟;60Hz...900~1550转/分钟。

● 各种安全规格以电机铭牌上的型号名取得认证。

● 注:“A”型号中电压为110V时,配置电容器容量以实际铭牌为准。

● It can be seen from the torque/speed curve of the speed-regulating motor, although the speed range of the speed-regulating motor is :50Hz... 90~1350 RPM; 60 Hz... 90~1550 revolutions per minute. But due to the low speed (400 RPM) or less, when the motor torque drop more, prone to overload, and poor motor directly connected the fan cooling effect, easy to heat, so must set aside enough power margin, and don't often work in low speed zone. Therefore, the optimal speed range of the motor is :50Hz... 900~1350 revolutions per minute; 60 Hz... 900~1550 RPM.

● When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

● Note "A" means the voltage 110v. the assembly capacitor value it is according to the label.

● 减速箱减速比/性能对照表 Gear reduction ratio/performance comparison

减速比 Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
50Hz	转速 Speed r/min	450	375	270	225	180	150	135	108	90	75	67.5	54	45	37.5	33.7	27	22.5	18	15	13.5	11	9	7.5	6.75
	转矩 Torque N.m	0.99	1.18	1.64	1.97	2.47	2.96	3.29	4.11	4.93	5.33	5.92	7.40	8.88	10	10	10	10	10	10	10	10	10	10	10
60Hz	转速 Speed r/min	516	430	310	258	206	172	155	124	103	86	77.5	62	51.6	43	38.75	31	25.8	20.6	17.2	15.5	12.9	10.3	8.6	7.75
	转矩 Torque N.m	0.86	1.03	1.43	1.72	2.15	2.57	2.86	3.57	4.29	4.63	5.15	6.43	7.72	9.26	9.5	10	10	10	10	10	10	10	10	10

● 表中转速是以电机的平均转速为基数除以减速比而算出的数值。实际转速将随负载大小而变化,变化范围2~20%。

● 表中 色框表示输出轴的旋转方向与电机旋转方向相反。

● 表中转矩是以电机额定转矩×减速比×传动效率计算而得。

● 减速箱的最大容许转矩为10N·M。


● In the table, the speed is calculated from the base of the motor's average speed divided by the deceleration ratio. The actual speed will vary with the load, ranging from 2% to 20%.

- The box in the table indicates that the rotation direction of the output axis is opposite to that of the motor.
- Table transfer torque is calculated from motor rated torque * deceleration ratio * transmission efficiency.
- The maximum allowable torque of the decelerator is 10N-M.

● **外形尺寸 (单位mm) Dimension (unit mm)**


● **圆轴电机**

重量 Weighr: 2.8kg

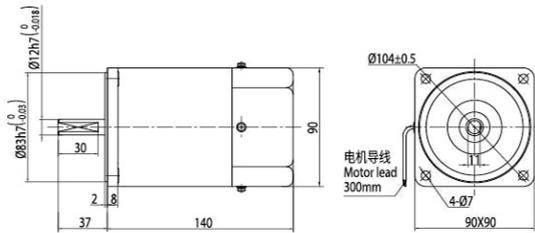


● **组合: 引线型电机 + 标准减速箱 (减速比 1:3~200)**

重量 Weighr: 4.15kg

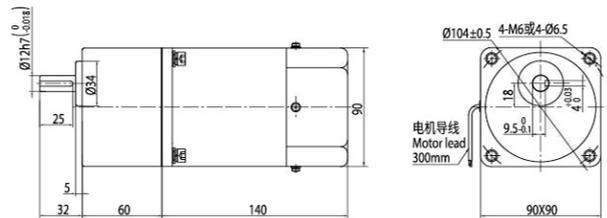

● **组合: 接线盒 (可选, 详见 P148) 型电机 + 标准减速箱 (减速比 1:3~200)**

重量 Weighr: 4.3kg

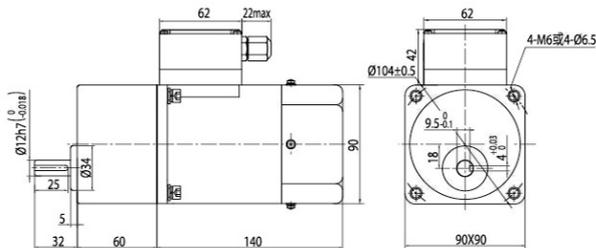


● **中间齿轮箱 Decimal Gearhead**


可安装在 GN 齿轮轴型上。Can be connected to GN pinion shafte type

电动机外形与齿轮轴型相同 5GN10XK

重量 Weight: 0.6kg

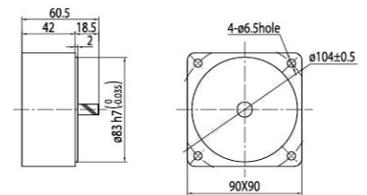

● **键 (减速器附件)**




● **短箱体 Short Gear Box**

● 其中速比 3~18 可以做成短型减速箱, 高度为 42mm。Gear ratio 3~18, short case is possible, Height of 42 mm.

● **接线图 Wiring Diagram**

- 运转方向指从电机轴看来的方向。CW 表示顺时针方向, CCW 表示逆时针方向。
- 表中所记型号为齿轮轴型, 圆轴型亦同。
- The direction of motor rotation is as viewed from the shaft end of motoc CW represents the clockwise direction, while CCW represents the counterdockwise direction.
- Name indicated in the list is pinion shaft we, also valid for the equivalent round shaft type.

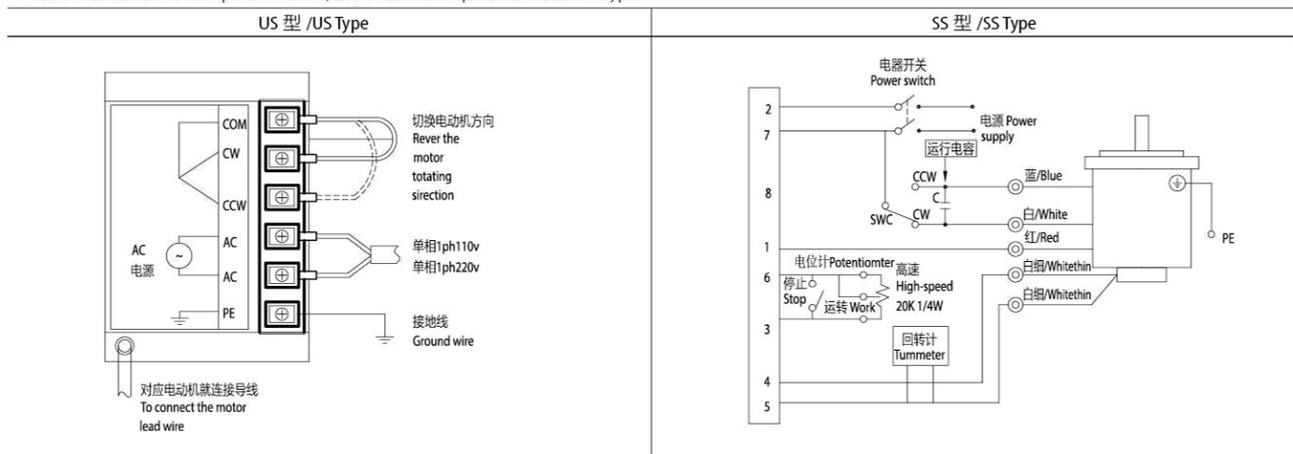

调速减速电机 SPEED CONTROL GEAR MOTOR

60W 90mm



● 电机型号/性能 List of motor characteristics

电机型号 Motor Model		输出功率 Output Power	电压 Voltage	频率 Frequency	电流 Current	转速范围 Speed Range	额定转矩 Rated Torque		启动转矩 Starting Torque	运行电容 Capacitor
齿轮轴型 Pinion Shaft	圆轴型 Round Shaft	W	V	Hz	A	r/min	90r/min	1200r/min	mN.m	μF/VAC
							mN.m			
5IK60RGU-CF	5IK60RA-CF	60	1ph220	50	0.47	90~1350	175	450	350	4.0/450
				60	0.50	90~1550	175	360	350	
5IK60RGU-AF	5IK60RA-AF	60	1ph110	50	0.92	90~1350	175	450	350	15.0/250
				60	0.93	90~1550	175	360	350	

● 从调速电机转矩/转速曲线可知,虽然调速电机的调速范围为:50Hz...90~1350转/分钟;60Hz...90~1550转/分钟。但由于低速时(≤400转/分钟),电机转矩下降较多,易发生过载,且电机直连风扇冷却效果差,易发热,因此必须预留足够的功率余量,并且不要经常工作在低速区。因此电机最佳调速范围为:50Hz...900~1350转/分钟;60Hz...900~1550转/分钟。

● 各种安全规格以电机铭牌上的型号名取得认证。

● 注:“A”型号中电压为110V时,配置电容器容量以实际铭牌为准。

● It can be seen from the torque/speed curve of the speed-regulating motor, although the speed range of the speed-regulating motor is :50Hz... 90~1350 RPM; 60 Hz... 90~1550 revolutions per minute. But due to the low speed (400 RPM) or less, when the motor torque drop more, prone to overload, and poor motor directly connected the fan cooling effect, easy to heat, so must set aside enough power margin, and don't often work in low speed zone. Therefore, the optimal speed range of the motor is :50Hz... 900~1350 revolutions per minute; 60 Hz... 900~1550 RPM.

● When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

● Note "sAit means the voltage 110v. the assembly capacitor vaule it is according the labe.

● 减速箱减速比/性能对照表 Gear reduction ratio/performance comparison

减速比 Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
50Hz	转速 Speed r/min	450	375	270	225	180	150	135	108	90	75	67.5	54	45	37.5	33.7	27	22.5	18	15	13.5	11	9	7.5	6.75
	转矩 Torque N.m	0.99	1.19	1.64	1.97	2.47	2.96	2.96	3.70	4.44	5.33	5.33	6.66	7.99	9.59	10.66	13.32	15.98	19.98	20	20	20	20	20	20
60Hz	转速 Speed r/min	516	430	310	258	206	172	155	124	103	86	77.5	62	51.6	43	38.75	31	25.8	20.6	17.2	15.5	12.9	10.3	8.6	7.75
	转矩 Torque N.m	0.86	1.03	1.43	1.72	2.15	2.57	2.87	3.22	3.86	4.63	5.01	5.79	6.95	8.34	9.26	11.58	13.90	17.37	18.76	20	20	20	20	20

● 表中转速是以电机的平均转速为基数除以减速比而算出的数值。实际转速将随负载大小而变化,变化范围2~20%。

● 表中 色框表示输出轴的旋转方向与电机旋转方向相反。

● 表中转矩是以电机额定转矩×减速比×传动效率计算而得。

● 减速箱的最大容许转矩为20N·M。


● In the table, the speed is calculated from the base of the motor's average speed divided by the deceleration ratio. The actual speed will vary with the load, ranging from 2% to 20%.

- The box in the table indicates that the rotation direction of the output axis is opposite to that of the motor.
- Table transfer torque is calculated from motor rated torque * deceleration ratio * transmission efficiency.
- The maximum allowable torque of the decelerator is 20N·M.

● **外形尺寸 (单位mm) Dimension (unit mm)**


● **组合: 引线型电机 + 标准减速箱 (减速比 1:3~200)**

重量 Weighr: 2.8kg

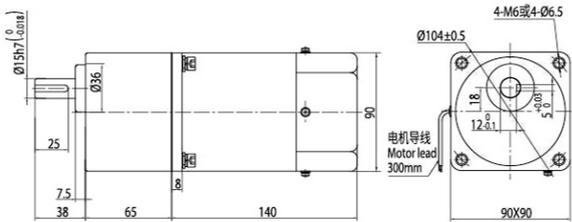


● **组合: 接线盒 (可选, 详见 P148) 型电机 + 标准减速箱 (减速比 1:3~200)**

重量 Weighr: 4.3kg

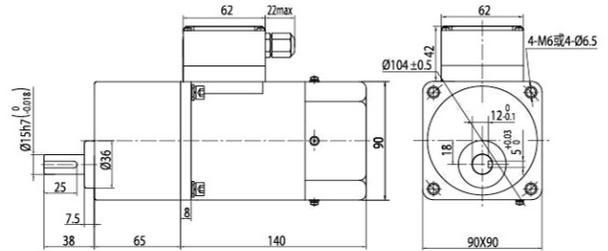

● **组合: 引线型电机 + 带耳型减速箱 (减速比 1:3~200)**

重量 Weighr: 4.45kg

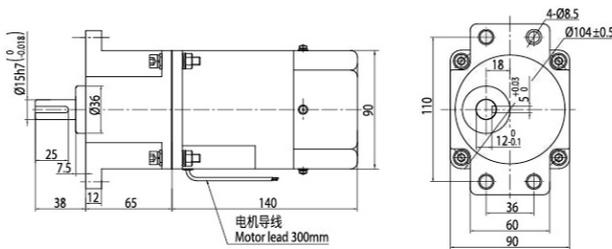


● **中间齿轮箱 Decimal Gearhead**


可安装在 GU 齿轮轴型上 Can be connected to GU pinion shaft type

电动机外形与齿轮轴型相同 5GU10XK

重量 Weight: 0.7kg

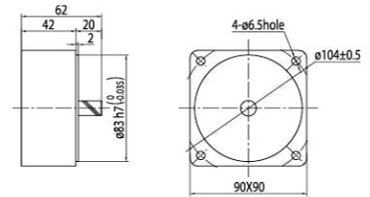


● **键 (减速器附件)**



● **接线图 Wiring Diagram**

- 运转方向指从电机轴看来的方向。CW 表示顺时针方向, CCW 表示逆时针方向。
- 表中所记型号为齿轮轴型, 圆轴型亦同。
- The direction of motor rotation is as viewed from the shaft end of motoc CW represents the clockwise direction, while CCW represents the counterdockwise direction.
- Name indicated in the list is pinion shaft we, also valid for the equivalent round shaft type.

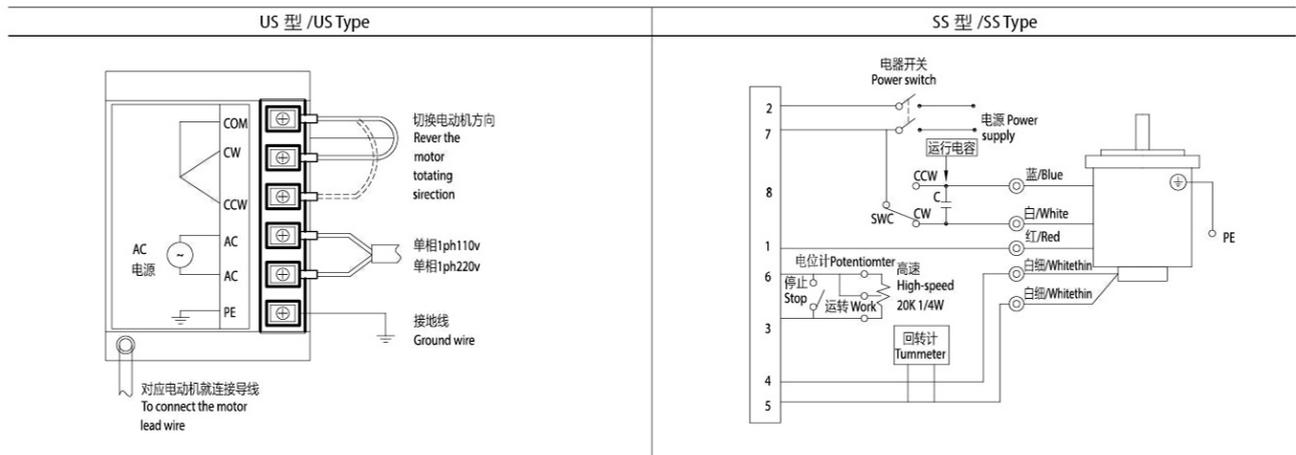

调速减速电机 SPEED CONTROL GEAR MOTOR

90W 90mm



● 电机型号/性能 List of motor characteristics

电机型号 Motor Model		输出功率 Output Power	电压 Voltage	频率 Frequency	电流 Current	转速范围 Speed Range	额定转矩 Rated Torque		启动转矩 Starting Torque	运行电容 Capacitor
齿轮轴型 Pinion Shaft	圆轴型 Round Shaft	W	V	Hz	A	r/min	90r/min	1200r/min	mN.m	μF/VAC
							mN.m			
5IK90RGU-CF	5IK90RA-CF	90	1ph220	50	0.65	90~1350	240	675	480	5.0/450
				60	0.78	90~1550	210	540	420	
5IK90RGU-AF	5IK90RA-AF	90	1ph110	50	1.30	90~1350	240	675	480	20.0/250
				60	1.40	90~1550	210	540	420	

● 从调速电机转矩/转速曲线可知,虽然调速电机的调速范围为:50Hz...90~1350转/分钟;60Hz...90~1550转/分钟。但由于低速时(≤400转/分钟),电机转矩下降较多,易发生过载,且电机直连风扇冷却效果差,易发热,因此必须预留足够的功率余量,并且不要经常工作在低速区。因此电机最佳调速范围为:50Hz...900~1350转/分钟;60Hz...900~1550转/分钟。

● 各种安全规格以电机铭牌上的型号名取得认证。

● 注:“A”型号中电压为110V时,配置电容器容量以实际铭牌为准。

● It can be seen from the torque/speed curve of the speed-regulating motor, although the speed range of the speed-regulating motor is :50Hz... 90~1350 RPM; 60 Hz... 90~1550 revolutions per minute. But due to the low speed (400 RPM) or less, when the motor torque drop more, prone to overload, and poor motor directly connected the fan cooling effect, easy to heat, so must set aside enough power margin, and don't often work in low speed zone. Therefore, the optimal speed range of the motor is :50Hz... 900~1350 revolutions per minute; 60 Hz... 900~1550 RPM.

● When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

● Note "sAit means the voltage 110v. the assembly capacitor vaule it is according the labe.

● 减速箱减速比/性能对照表 Gear reduction ratio/performance comparison

减速比 Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
50Hz	转速 Speed r/min	450	375	270	225	180	150	135	108	90	75	67.5	54	45	37.5	33.7	27	22.5	18	15	13.5	11	9	7.5	6.75
	转矩 Torque N.m	1.56	1.88	2.60	3.13	3.91	4.69	5.1	5.86	7.03	8.44	8.8	10.55	12.66	15.19	16.88	20	20	20	20	20	20	20	20	20
60Hz	转速 Speed r/min	516	430	310	258	206	172	155	124	103	86	77.5	62	51.6	43	38.75	31	25.8	20.6	17.2	15.5	12.9	10.3	8.6	7.75
	转矩 Torque N.m	1.29	1.55	2.15	2.58	3.22	3.86	4.3	4.83	5.80	6.96	7.3	8.69	10.43	12.52	13.91	17.39	20	20	20	20	20	20	20	20

● 表中转速是以电机的平均转速为基数除以减速比而算出的数值。实际转速将随负载大小而变化,变化范围2~20%。

● 表中色框表示输出轴的旋转方向与电机旋转方向相反。

● 表中转矩是以电机额定转矩×减速比×传动效率计算而得。

● 减速箱的最大容许转矩为20N·M。


● In the table, the speed is calculated from the base of the motor's average speed divided by the deceleration ratio. The actual speed will vary with the load, ranging from 2% to 20%.

- The box in the table indicates that the rotation direction of the output axis is opposite to that of the motor.
- Table transfer torque is calculated from motor rated torque * deceleration ratio * transmission efficiency.
- The maximum allowable torque of the decelerator is 20N·M.

● **外形尺寸 (单位mm) Dimension (unit mm)**


● **圆轴电机**

重量 Weighr: 3.3kg

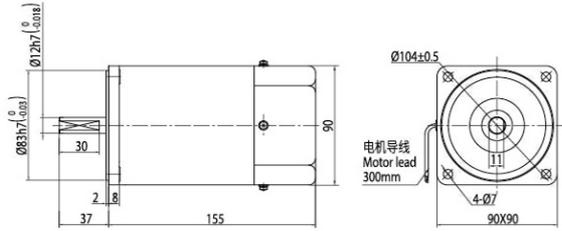


● **组合: 引线型电机 + 标准减速箱 (减速比 1:3~200)**

重量 Weighr: 4.8kg

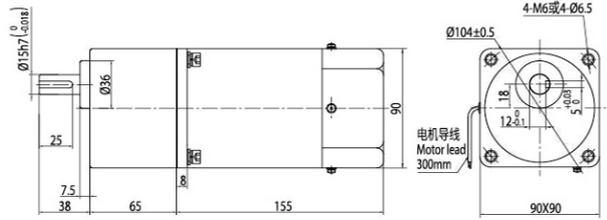


● **组合: 接线盒 (可选, 详见 P148) 型电机 + 标准减速箱 (减速比 1:3~200)**

重量 Weighr: 4.95kg

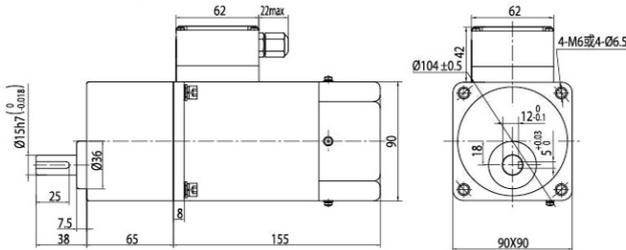

● **组合: 引线型电机 + 带耳型减速箱 (减速比 1:3~200)**


重量 Weighr: 4.8kg

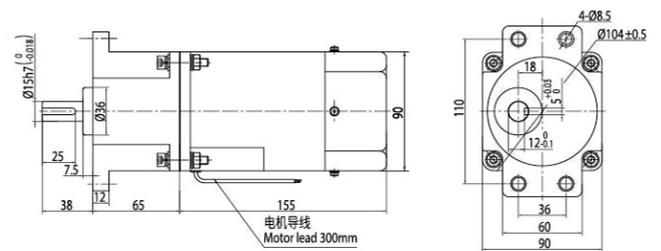


● **中间齿轮箱 Decimal Gearhead**

可安装在 GU 齿轮轴型上 Can be connected to GU pinion shaft type
 电动机外形与齿轮轴型相同 5GU10XK

重量 Weight: 0.7kg

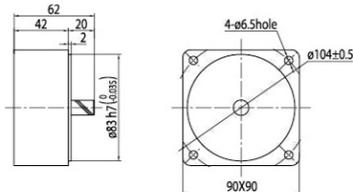


● **键 (减速器附件)**



● **接线图Wiring Diagram**

- 运转方向指从电机轴看来的方向。CW 表示顺时针方向, CCW 表示逆时针方向。
- 表中所记型号为齿轮轴型, 圆轴型亦同。
- The direction of motor rotation is as viewed from the shaft end of motoc CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Name indicated in the list is pinion shaft we, also valid for the equivalent round shaft type.

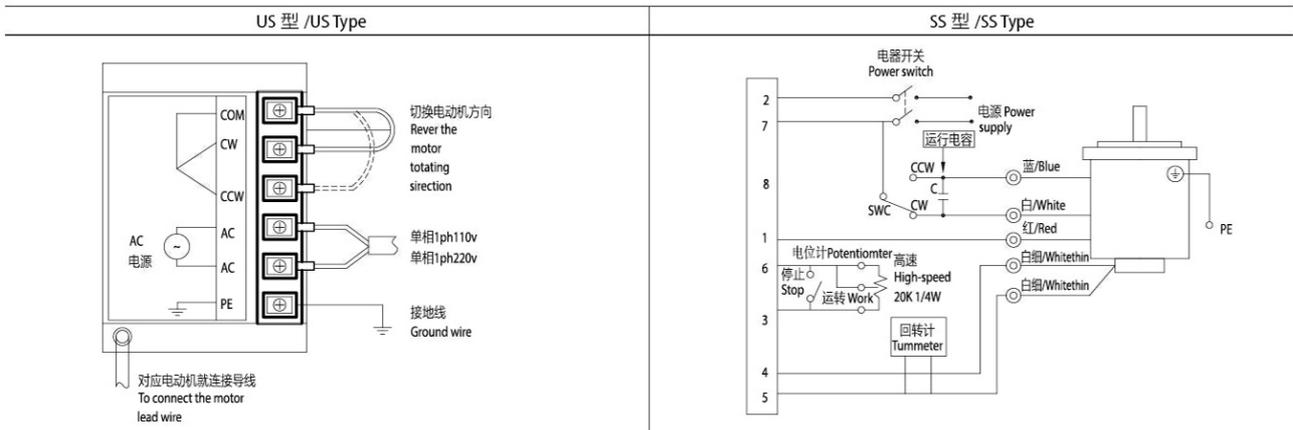

调速减速电机 SPEED CONTROL GEAR MOTOR

120W 90mm



● 电机型号/性能 List of motor characteristics

电机型号 Motor Model		输出功率 Output Power	电压 Voltage	频率 Frequency	电流 Current	转速范围 Speed Range	额定转矩 Rated Torque		启动转矩 Starting Torque	运行电容 Capacitor
齿轮轴型 Pinion Shaft	圆轴型 Round Shaft	W	V	Hz	A	r/min	90r/min	1200r/min	mN.m	μF/VAC
							mN.m			
5IK120RGU-CF	5IK120RA-CF	120	1ph220	50	1.24	90~1350	320	900	620	6.0/450
				60	1.12	90~1550	280	720	540	
5IK120RGU-AF	5IK120RA-AF	120	1ph110	50	1.70	90~1350	320	900	620	25.0/250
				60	1.82	90~1550	280	720	540	

● 从调速电机转矩/转速曲线可知,虽然调速电机的调速范围为:50Hz...90~1350转/分钟;60Hz...90~1550转/分钟。但由于低速时(≤400转/分钟),电机转矩下降较多,易发生过载,且电机直连风扇冷却效果差,易发热,因此必须预留足够的功率余量,并且不要经常工作在低速区。因此电机最佳调速范围为:50Hz...900~1350转/分钟;60Hz...900~1550转/分钟。

● 各种安全规格以电机铭牌上的型号名取得认证。

● 注:“A”型号中电压为110V时,配置电容器容量以实际铭牌为准。

● It can be seen from the torque/speed curve of the speed-regulating motor, although the speed range of the speed-regulating motor is :50Hz... 90~1350 RPM; 60 Hz... 90~1550 revolutions per minute. But due to the low speed (400 RPM) or less, when the motor torque drop more, prone to overload, and poor motor directly connected the fan cooling effect, easy to heat, so must set aside enough power margin, and don't often work in low speed zone. Therefore, the optimal speed range of the motor is :50Hz... 900~1350 revolutions per minute; 60 Hz... 900~1550 RPM.

● When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

● Note "sAit means the voltage 110v. the assembly capacitor vaule it is according the labe.

● 减速箱减速比/性能对照表 Gear reduction ratio/performance comparison

减速比 Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
50Hz	转速 Speed r/min	450	375	270	225	180	150	135	108	90	75	67.5	54	45	37.5	33.7	27	22.5	18	15	13.5	11	9	7.5	6.75
	转矩 Torque N.m	1.56	1.88	2.60	3.13	3.91	4.69	5.1	5.86	7.03	8.44	8.8	10.55	12.66	15.19	16.88	20	20	20	20	20	20	20	20	20
60Hz	转速 Speed r/min	516	430	310	258	206	172	155	124	103	86	77.5	62	51.6	43	38.75	31	25.8	20.6	17.2	15.5	12.9	10.3	8.6	7.75
	转矩 Torque N.m	1.29	1.55	2.15	2.58	3.22	3.86	4.3	4.83	5.80	6.96	7.3	8.69	10.43	12.52	13.91	17.39	20	20	20	20	20	20	20	20

● 表中转速是以电机的平均转速为基数除以减速比而算出的数值。实际转速将随负载大小而变化,变化范围2~20%。

● 表中色框表示输出轴的旋转方向与电机旋转方向相反。

● 表中转矩是以电机额定转矩×减速比×传动效率计算而得。

● 减速箱的最大容许转矩为20N·M。


● In the table, the speed is calculated from the base of the motor's average speed divided by the deceleration ratio. The actual speed will vary with the load, ranging from 2% to 20%.

- The box in the table indicates that the rotation direction of the output axis is opposite to that of the motor.
- Table transfer torque is calculated from motor rated torque * deceleration ratio * transmission efficiency.
- The maximum allowable torque of the decelerator is 20N·M.

● **外形尺寸 (单位mm) Dimension (unit mm)**


● **圆轴电机**

重量 Weighr: 3.5kg

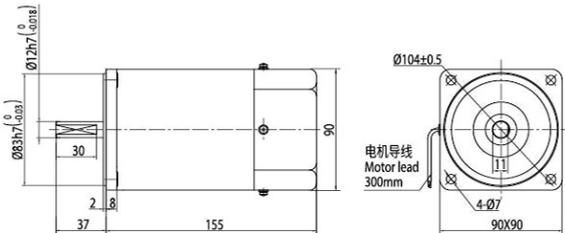


● **组合: 引线型电机 + 标准减速箱 (减速比 1:3~200)**

重量 Weighr: 5.0kg

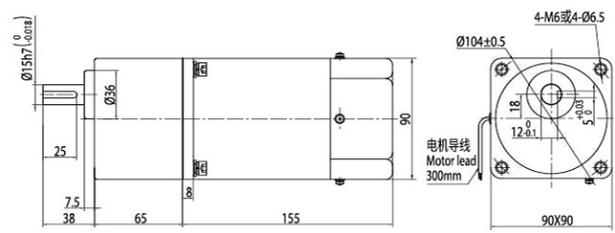


● **组合: 接线盒 (可选, 详见 P148) 型电机 + 标准减速箱 (减速比 1:3~200)**

重量 Weighr: 5.15kg

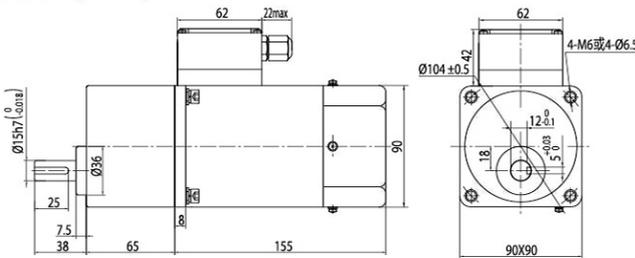

● **组合: 引线型电机 + 带耳型减速箱 (减速比 1:3~200)**

重量 Weighr: 5.0kg

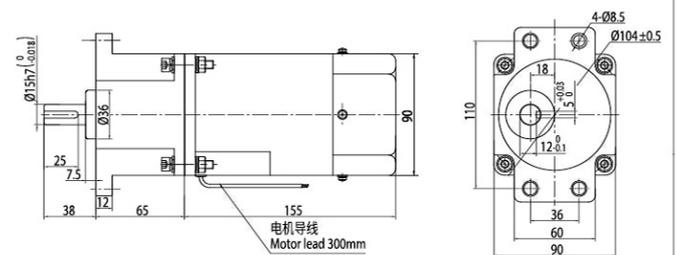


● **中间齿轮箱 Decmal Gearhead**


可安装在 GU 齿轮轴型上 Can be connected to GU pinion shaft type

电动机外形与齿轮轴型相同 5GU10XK

重量 Weight: 0.7kg

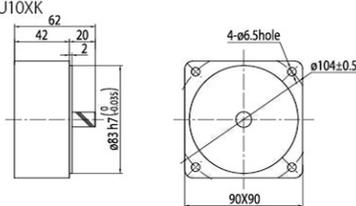


● **键 (减速器附件)**



● **接线图Wiring Diagram**

- 运转方向指从电机轴看来的方向。CW 表示顺时针方向, CCW 表示逆时针方向。
- 表中所记型号为齿轮轴型, 圆轴型亦同。
- The direction of motor rotation is as viewed from the shaft end of motoc CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Name indicated in the list is pinion shaft we, also valid for the equivalent round shaft type.

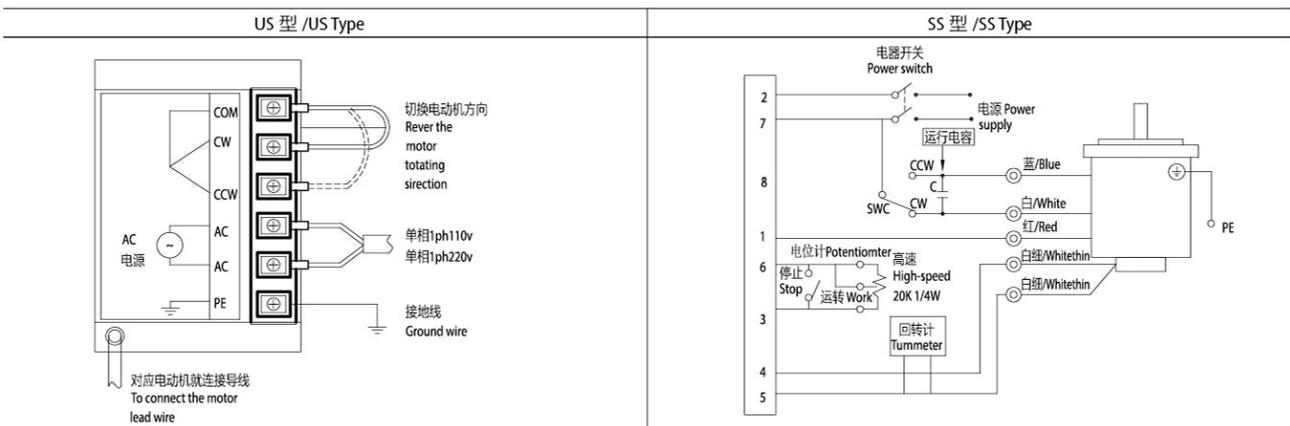

调速减速电机 SPEED CONTROL GEAR MOTOR

200W 104mm



● 电机型号/性能 List of motor characteristics

电机型号 Motor Model		输出功率 Output Power	电压 Voltage	频率 Frequency	电流 Current	转速范围 Speed Range	额定转矩 Rated Torque		启动转矩 Starting Torque	运行电容 Capacitor
齿轮轴型 Pinion Shaft	圆轴型 Round Shaft	W	V	Hz	A	r/min	90r/min	1200r/min	mN.m	μF/VAC
							mN.m			
6IK200RGU-CF	6IK200RA-CF	200	1ph220	50	1.30	90~1350	500	1450	1050	10.0/450
				60	1.30	90~1550	450	1200	900	
6IK200RGU-AF	6IK200RA-AF	200	1ph110	50	2.60	90~1350	500	1450	950	35.0/250
				60	2.70	90~1550	450	1200	920	

●从调速电机转矩/转速曲线可知,虽然调速电机的调速范围为:50Hz...90~1350转/分钟;60Hz...90~1550转/分钟。但由于低速时(≤400转/分钟),电机转矩下降较多,易发生过载,且电机直连风扇冷却效果差,易发热,因此必须预留足够的功率余量,并且不要经常工作在低速区。因此电机最佳调速范围为:50Hz...900~1350转/分钟;60Hz...900~1550转/分钟。

●各种安全规格以电机铭牌上的型号名取得认证。

●注:“A”型号中电压为110V时,配置电容器容量以实际铭牌为准。

●It can be seen from the torque/speed curve of the speed-regulating motor, although the speed range of the speed-regulating motor is :50Hz... 90~1350 RPM; 60 Hz... 90-1550 revolutions per minute. But due to the low speed (400 RPM) or less, when the motor torque drop more, prone to overload, and poor motor directly connected the fan cooling effect, easy to heat, so must set aside enough power margin, and don't often work in low speed zone. Therefore, the optimal speed range of the motor is :50Hz... 900~1350 revolutions per minute; 60 Hz... 900~1550 RPM.

● When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

● Note "A" means the voltage 110v, the assembly capacitor value it is according to the label.

● 减速箱减速比/性能对照表 Gear reduction ratio/performance comparison

减速比 Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
50Hz	转速 Speed r/min	450	375	270	225	180	150	135	108	90	75	67.5	54	45	37.5	33.7	27	22.5	18	15	13.5	11	9	7.5	6.75
	转矩 Torque N.m	3.11	3.74	5.19	6.23	7.78	9.34	9.34	11.67	14.01	16.81	16.81	21.01	25.21	30.26	33.62	40	40	40	40	40	40	40	40	40
60Hz	转速 Speed r/min	516	430	310	258	206	172	155	124	103	86	77.5	62	51.6	43	38.75	31	25.8	20.6	17.2	15.5	12.9	10.3	8.6	7.75
	转矩 Torque N.m	2.58	3.09	4.29	5.15	6.44	7.73	7.73	9.66	11.59	13.91	13.91	17.39	20.86	25.04	27.82	34.77	40	40	40	40	40	40	40	40

●表中转速是以电机的平均转速为基数除以减速比而算出的数值。实际转速将随负载大小而变化,变化范围2~20%。

●表中色框表示输出轴的旋转方向与电机旋转方向相反。

●表中转矩是以电机额定转矩×减速比×传动效率计算而得。

●减速箱的最大容许转矩为40N·M。


● In the table, the speed is calculated from the base of the motor's average speed divided by the deceleration ratio. The actual speed will vary with the load, ranging from 2% to 20%.

- The box in the table indicates that the rotation direction of the output axis is opposite to that of the motor.
- Table transfer torque is calculated from motor rated torque * deceleration ratio * transmission efficiency.
- The maximum allowable torque of the decelerator is 40N-M.

● **外形尺寸 (单位mm) Dimension (unit mm)**


● **圆轴电机**

重量 Weighr: 5.1kg

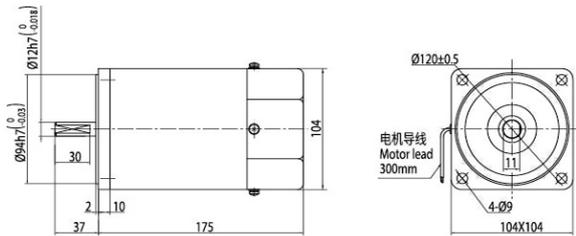

● **组合: 引线型电机 + 标准减速箱 (减速比 1:3~200)**


重量 Weighr: 7.2kg

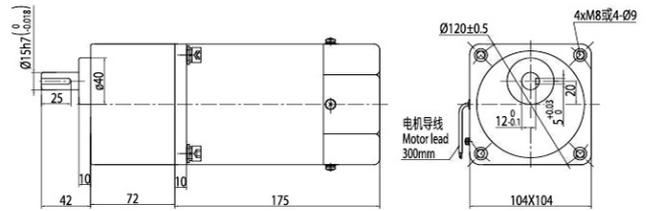

● **组合: 接线盒 (可选, 详见 P148) 型电机 + 标准减速箱 (减速比 1:3~200)**

重量 Weighr: 7.35kg

● **键 (减速器附件)**

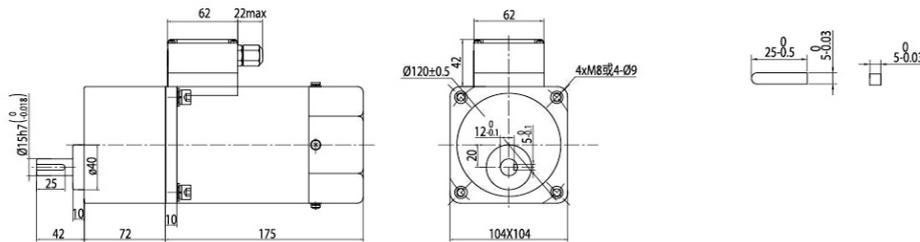


● **短箱体 Short Gear Box**

- 其中速比 3~40 可以做成短型减速箱, 高度为 65mm。Gear ratio 3~40, short case is possible, Height of 65 mm.

● **接线图 Wiring Diagram**

- 运转方向指从电机轴看来的方向。CW 表示顺时针方向, CCW 表示逆时针方向。
- 表中所记型号为齿轮轴型, 圆轴型亦同。
- The direction of motor rotation is as viewed from the shaft end of motoc CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Name indicated in the list is pinion shaft we, also valid for the equivalent round shaft type.

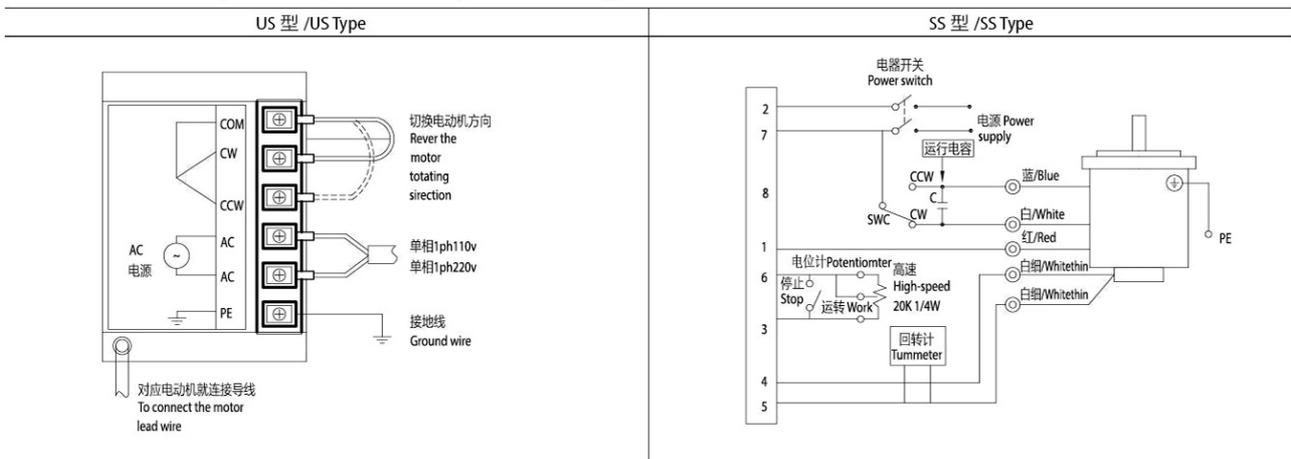

转速-转矩曲线

ROTATIONAL SPEED - TORQUE CURVE

● 单相电机 Single phase motor

